


LEAD EXTRUDER HORIZONTAL - LEH

H. FOLKE SANDELIN AB



ESP PUMP CABLE MANUFACTURE

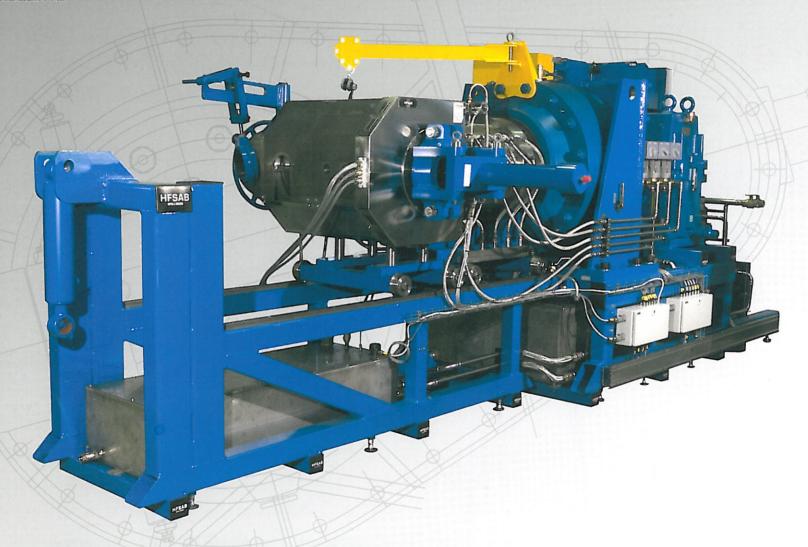

H. FOLKE SANDELIN AB

TECHNICAL DATA

DIE BLOCK

DIAMETER OVER LEAD

9"B

6-50 mm

RADIAL THICKNESS

FROM 0,7 mm FOR SMALLEST DIAMETER

10 TON MELTING POT

PbCu

LINE SPEED UP TO 50 m/min (diameter dependent)

HORIZONTAL LEAD EXTRUDER FOR ESP PUMP CABLES

SPECIFICALLY DESIGNED FOR HIGHER PRESSURES AND HIGHER SPEEDS

FLOOR STANDING WITH NO SPECIAL FOUNDATIONS REQUIRED

FULLY AUTOMATIC


TEMPERATURE CONTROL +/- 2°C

PERFECT HOMOGENEOUS LEAD SHEATH WITH VERY CLOSE TOLERANCES

PERFECT MOISTURE BARRIER

CONTINUOUS EXTRUSION FOR SEVERAL WEEKS

EXTREMELY RELIABLE AND EASY TO OPERATE



Tel. +46 (0) 141 20 36 30 Fax. +46 (0) 141 20 36 39 E-mail. hfsab@hfsab.com Web. www.hfsab.com



ESP LEAD SHEATHED CABLE



SCREW HOUSING AND DIE BLOCK



MAIN MOTOR



ESP CABLE