


HFSAB

H. FOLKE SANDELIN AB

LEAD EXTRUDER HORIZONTAL - LEH

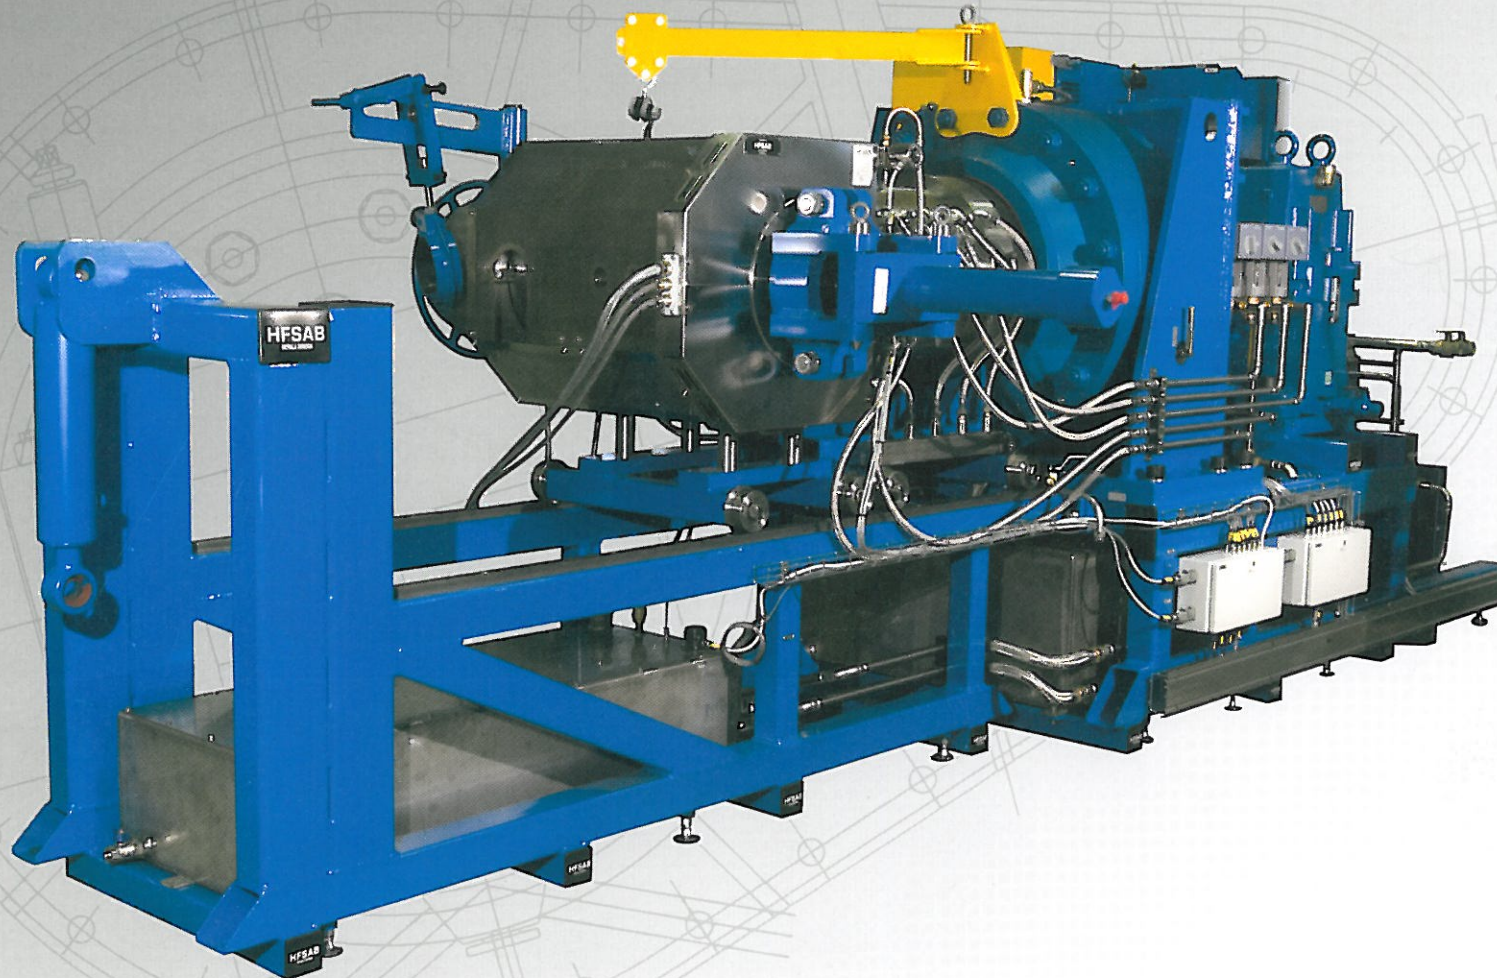

WORLD LEADING SUPPLIER TO THE CABLE INDUSTRY

HFSAB

H. FOLKE SANDELIN AB

TECHNICAL DATA

DIE BLOCK RANGE

DIE BLOCK DIAMETER OVER LEAD

9"B	6-50 mm
9"	9-85 mm
11"	10-110 mm
12¼"	50-125 mm
13¼"	85-150 mm
14,4"	110-190 mm

MELTING POT SIZES

10 TON
18 TON
35 TON
60 TON



TYPICAL OUTPUTS

ALLOY E	16-18 kg/min
ALLOY ½ C	23-25 kg/min

H. Folke Sandelin AB
Dynamovägen 7
Box 4086
SE-591 04 Motala
Sweden

Tel. +46 (0) 141 20 36 30
Fax. +46 (0) 141 20 36 39
E-mail. hfsab@hfsab.com
Web. www.hfsab.com

- HORIZONTAL LEAD EXTRUDER FOR THE FOLLOWING APPLICATIONS: LV/MV/HV AND EHV CABLES, ESP PUMP CABLES, OIL AND GAS INDUSTRY CABLES, SUBMARINE CABLES, OIL IMPREGNATED PAPER CABLES, TELECOMMUNICATION CABLES AND RUBBER CABLES VULCANISED UNDER A LEAD SHEATH
- FLOOR STANDING WITH NO SPECIAL FOUNDATIONS REQUIRED
- CUSTOMERS IN MORE THAN 50 COUNTRIES
- 40+ HORIZONTAL EXTRUDERS SOLD SINCE 2005
- FULLY AUTOMATIC
- TEMPERATURE CONTROL +/- 2°C
- PERFECT HOMOGENEOUS LEAD SHEATH WITH VERY CLOSE TOLERANCES
- PERFECT MOISTURE BARRIER
- CONTINUOUS EXTRUSION FOR SEVERAL WEEKS
- EXTREMELY RELIABLE AND EASY TO OPERATE

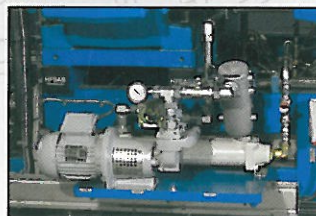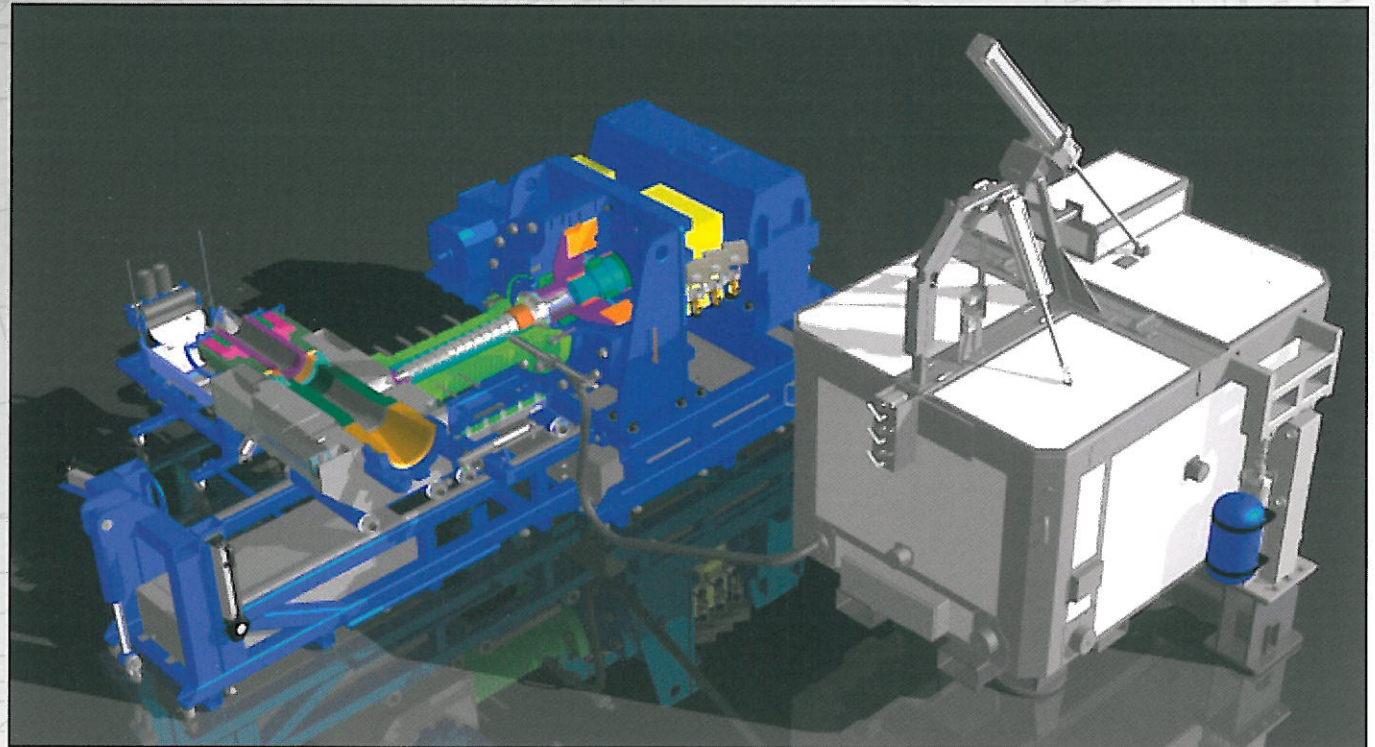

OIL PUMP



WATER COOLING SYSTEM



MELTING POT



DIE BLOCK